




inventor®

We invent. You live.

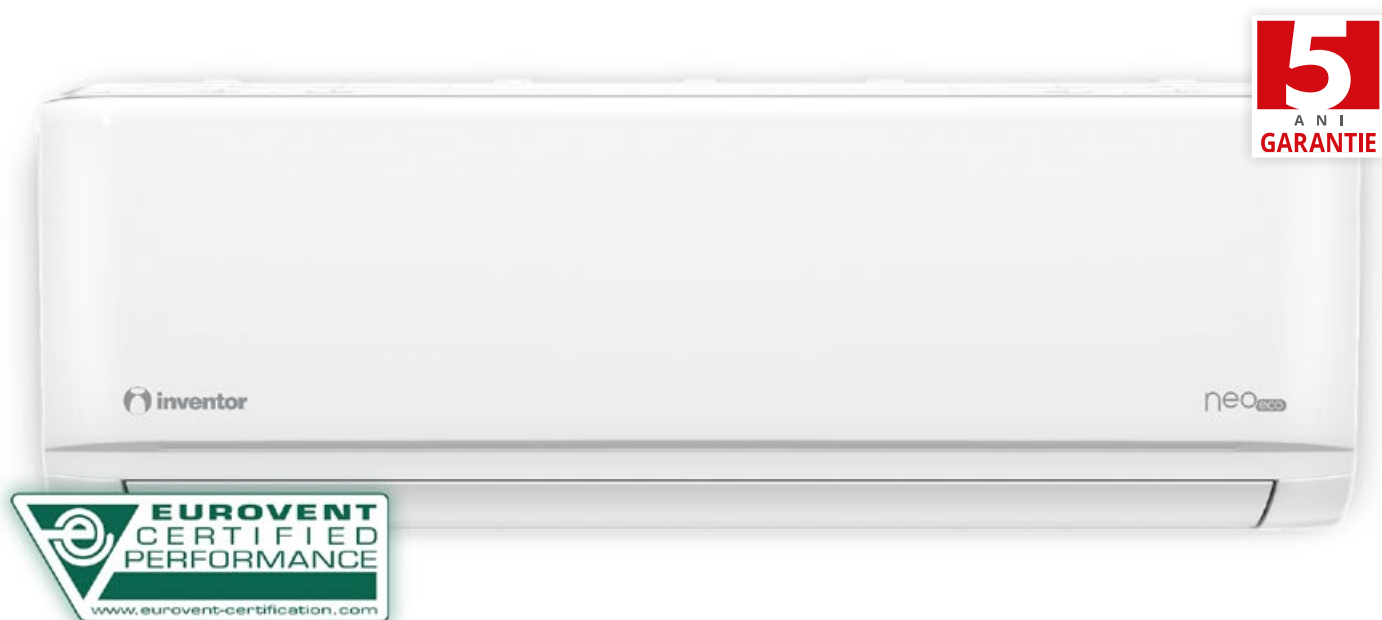

neoeco

Economie maxima de energie pe tot parcursul anului!



Clasa energetica
A+++ pe racire



iA Plus
(Inverter Algorithm Plus)



Wi-Fi inclus &
comanda vocala



Mod
Breeze Away



Tehnologie UV-C
& ionizator



Aplicatia Wi-Fi este compatibila cu Siri Shortcuts, Google Assistant* si Amazon Alexa**.

*Sigla Google este o marca comerciala a Google LLC. Exista posibilitatea ca functia Google Assistant sa nu fie disponibila in unele tari si limbi.
**Amazon, Alexa si siglele aferente sunt marci comerciale ale Amazon.com, Inc., sau afiliatilor sai.



Mod ultra silentios
19 dB(A)



Follow Me



Incalzire la -20°C



Hotel Menu




Controller centralizat*



Contact On/Off



Flux de aer in 4 directii



Filtru de sterilizare HEPA

Model			NECUVI-09WFI/NECUVO-09	NECUVI-12WFI/NECUVO-12
Capacitate racire (Btu/h)			9.000 (3.500-11.000)	12.000 (4.700-14.700)
Capacitate racire (kW)			2.64 (1.03-3.22)	3.52 (1.38-4.31)
Capacitate incalzire (Btu/h)			10.000 (2.800-11.500)	13.584 (3.640-14.950)
Capacitate incalzire (kW)			2.93 (0.82-3.37)	3.98 (1.07-4.38)
Eficienta sezoniera (in conformitate cu EN14825)	Racire	Pdesign (kW)	2.6	3.5
		Clasa energetica	A+++	A+++
		SEER	8.8	8.5
		Consum anual de curent electric (kWh/an)	103	144
	Incalzire (clima medie)	Pdesign (kW)	2.4	2.6
		Clasa energetica	A++	A++
		SCOP	4.6	4.6
		Consum anual de curent electric (kWh/an)	730	791
	Incalzire (clima calda)	Pdesign (kW)	2.7	3.1
		Clasa energetica	A+++	A+++
		SCOP	6.0	6.0
		Consum anual de curent electric (kWh/an)	630	723
Voltaj/Frecventa/Faza (V/Hz/Ph)			220-240/50/1	220-240/50/1
Intensitate curent (A)	Racire	2.73 (0.35-4.78)	3.3 (0.4-8.5)	
	Incalzire	3.4 (0.4-11.4)	3.4 (0.4-11.4)	
Consum energetic (kW)	Racire	0.54 (0.1-1.9)	0.75 (0.1-1.9)	
	Incalzire	0.77 (0.5-2.6)	0.77 (0.5-2.6)	
Debit de aer (Mare/Mediu/Mic) (m ³ /h)			548/489/383	520/370/310
Nivel de zgomot [dB(A)]	Unitate interioara (Silentios/Mic/Mediu/Mare)	19/22/31/37	21/22/33/39	
	Unitate exterioara	54	54.5	
Putere sonora [dB(A)]	Unitate interioara	54	55	
	Unitate exterioara	58	61	
Volum de umidificare	(L/h)	1.2	1.6	
	(L/zi)	28.8	38.4	
Tip compresor			ROTATIV	ROTATIV
Traseu lichid Traseu gaz			1/4" 3/8"	1/4" 3/8"
Sigurante (A)			3x1.5x10	3x1.5x10
Cablu de comunicare (Nr x mm ²)			5x1.5	5x1.5
Dimensiuni (LxAxl) (mm)	Unitate interioara	802x200x295	802x200x295	
	Unitate exterioara	765x303x555	765x303x555	
Greutate neta (kg)			8.7/26.4	8.7/26.4
Agent frigorific/Cantitate (g)			R32 / 620	R32 / 620
Interval de functionare la temperaturi exterioare (°C)	Racire	-15 ~ 50	-15 ~ 50	
	Incalzire	-20 ~ 24	-20 ~ 24	

*Este necesara achizitia unui kit de conectare individual pentru fiecare unitate.