




inventor®

We invent. You live.

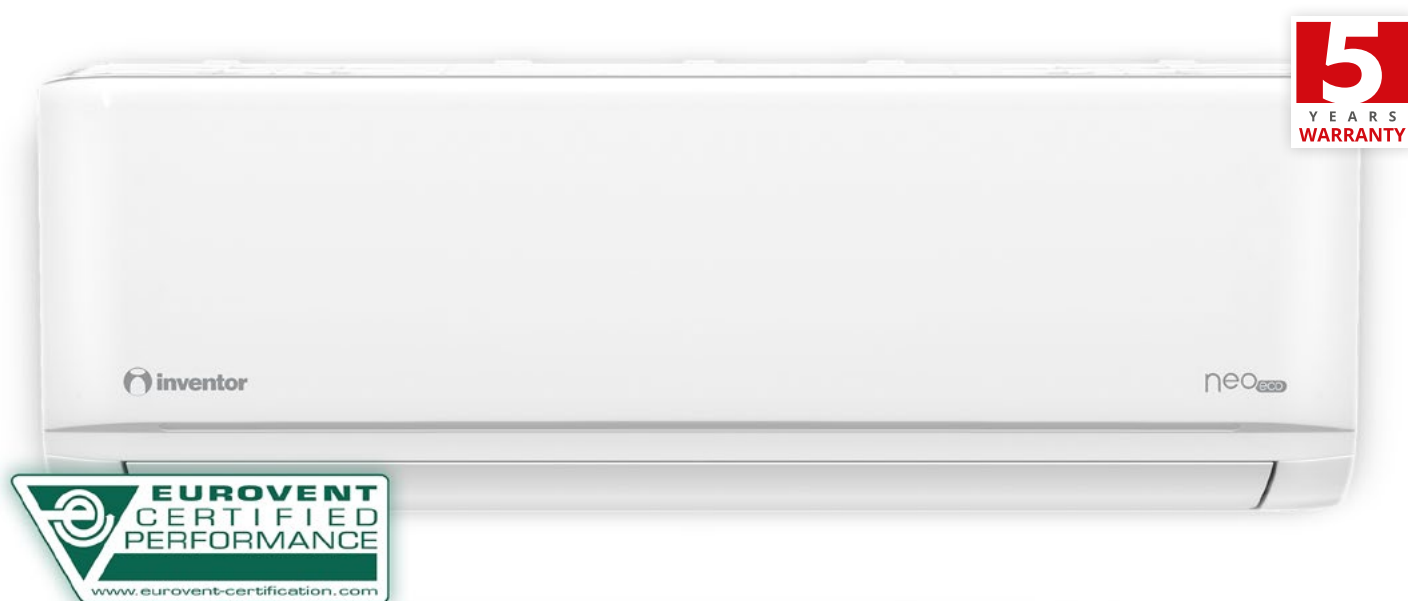

neo_{eco}

Maximum energy savings throughout the year!



Energy Class
Cooling/Heating



Inverter
Algorithm Plus



Wi-Fi with
Voice Control



Breeze
Away



Ultraviolet Type C
& Ionizer Technology



The WiFi APP is compatible with Siri Shortcuts, Google Assistant*, and Amazon Alexa**.

*The Google logo is a trademark of Google LLC.

The Google Assistant feature may not be available in some countries and languages.

** Amazon, Alexa, and related logos are trademarks of Amazon.com, Inc., or its affiliates.



Ultra Silence Mode 19dB(A)



Follow Me



Low Ambient Heating at -20°C



Hotel Menu



Central Control*



Remote On/Off*



4 Way Air Flow



Sterilization HEPA Filter

Model			NECUVI-09WFI/NECUVO-09	NECUVI-12WFI/NECUVO-12
Cooling Capacity (Btu/h)			9.000 (3.500-11.000)	12.000 (4.700-14.700)
Cooling Capacity (kWatt)			2.64 (1.03-3.22)	3.52 (1.38-4.31)
Heating Capacity (Btu/h)			10.000 (2.800-11.500)	13.584 (3.640-14.950)
Heating Capacity (kWatt)			2.93 (0.82-3.37)	3.98 (1.07-4.38)
Seasonal Efficiency (In accordance to EN14825)	Cooling	Pdesign (kW)	2.6	3.5
		Energy Class	A+++	A+++
		SEER	8.8	8.5
		Annual Power Consumption (kWh/year)	103	144
	Heating (Middle Zone)	Pdesign (kW)	2.4	2.6
		Energy Class	A++	A++
		SCOP	4.6	4.6
		Annual Power Consumption (kWh/year)	730	791
	Heating (Warm Zone)	Pdesign (kW)	2.7	3.1
		Energy Class	A+++	A+++
		SCOP	6.0	6.0
		Annual Power Consumption (kWh/year)	630	723
Voltage / Frequency / Phase (V/Hz/Ph)			220-240/50/1	220-240/50/1
Current Input (A)	Cooling	2.73 (0.35-4.78)	3.3 (0.4-8.5)	
	Heating	3.4 (0.4-11.4)	3.4 (0.4-11.4)	
Power Input (kW)	Cooling	0.54 (0.1-1.9)	0.75 (0.1-1.9)	
	Heating	0.77 (0.5-2.6)	0.77 (0.5-2.6)	
Air Flow Volume (High/Medium/Low) (m³/h)			548/489/383	520/370/310
Noise Level [dB(A)]	Indoor Unit (Silent/Low/Medium/High)	19/22/31/37	21/22/33/39	
	Outdoor Unit	54	54.5	
Sound Power Level [dB(A)]	Indoor Unit	54	55	
	Outdoor Unit	58	61	
Dehumidifying Volume	L/h	1.2	1.6	
	L/day	28.8	38.4	
Compressor Type			ROTARY	ROTARY
Liquid line Gas line			1/4" 3/8"	1/4" 3/8"
Power Supply Wire Outdoor / Fuses (Noxmm²)/(A)			3x1.5x10	3x1.5x10
Signal Wires (Noxmm²)			5x1.5	5x1.5
Dimensions (WxDxH) (mm)	Indoor Unit	802x200x295	802x200x295	
	Outdoor Unit	765x303x555	765x303x555	
Net Weight (kg)			8.7/26.4	8.7/26.4
Refrigerant / Charge (g)			R32 / 620	R32 / 620
Outdoor Operation Temperature Range (°C)	Cooling	-15 ~ 50	-15 ~ 50	
	Heating	-20 ~ 24	-20 ~ 24	

*The purchase of an individual connection kit for each unit is required.