


Omnia plus



Anti-Cold Air Function

Indoor fan speed is regulated automatically from the lowest grade to the setting grade according to the evaporator temperature when the unit starts heating operation.

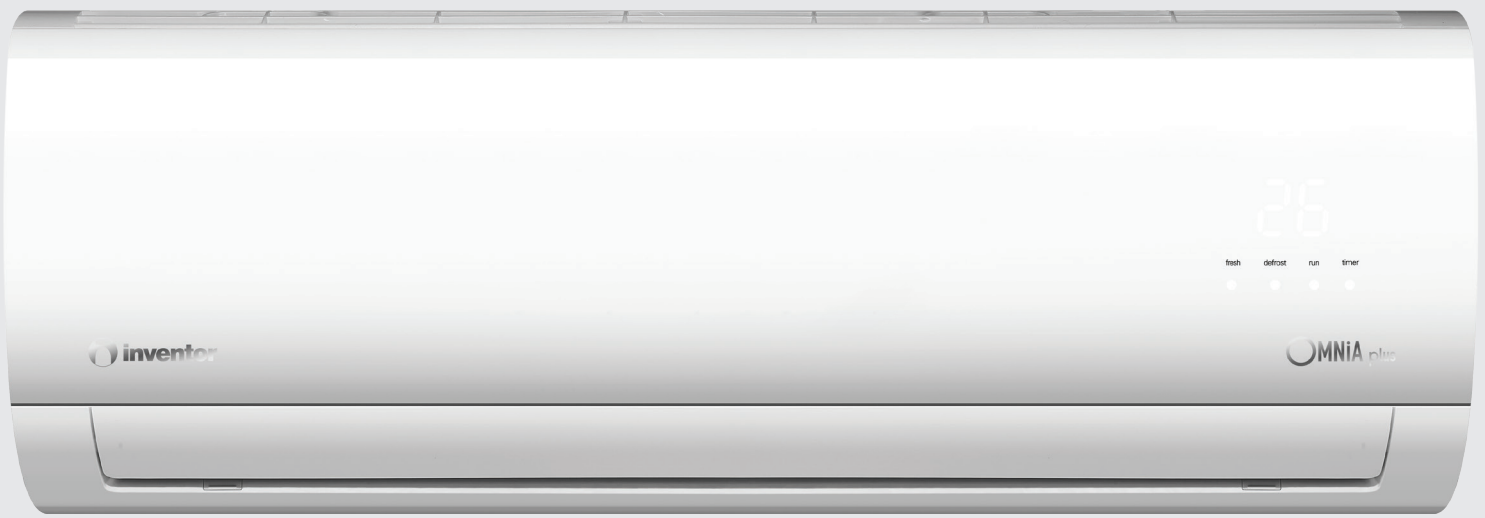

24-Hours Timer

Set the unit to start and stop automatically in a 24h period and save energy.



Sleep Mode

With the Sleep Mode, the air conditioner, adjusts the room temperature for perfect sleeping conditions and energy saving.



OMNIA plus



Turbo Mode



Louver Position
Memory



Auto
Restart



24-Hours
Timer



Refrigerant
Leakage
Detect




Auto Error
Diagnosis




2 Way
Draining




Anti-Cold Air
Function



Auto Swing
Louver



Automatic
Operation



Connecting Pipes
and Cables
(Optional)

MODEL		01HMI-09/01HMO-09	01HMI-12/01HMO-12	01HMI-18/01HMO-18	01HMI-24/01HMO-24
Cooling Capacity (Btu/h)		9.000	12.000	17.000	22.000
Cooling Capacity (kWatt)		2.64	3.52	4.98	6.45
Heating Capacity (Btu/h)		9.500	13.000	18.000	23.000
Heating Capacity (kWatt)		2.78	3.81	5.28	6.74
EER(W/W)		2.61	2.61	2.61	2.61
COP(W/W)		2.81	3.26	3.01	3.01
Voltage / Frequency / Phase (V/Hz/Ph)		230/50/1	230/50/1	230/50/1	230/50/1
Current Input (A)	Cooling	4.4	5.8	8.3	10.7
	Heating	4.3	5.1	7.6	9.7
Power Input (W)	Cooling	1.010	1.347	1.908	2.470
	Heating	990	1.168	1.752	2.238
Air Flow Volume (m ³ /h) (High/Medium/Low)		457/405/351	574/447/350	751/607/488	1.066/956/764
Noise Level (dB(A))	Indoor unit (Low/Medium/High)	30.6/35.7/39.6	32.2/37.8/42.9	33.8/38.8/43.9	38.8/43.9/46.4
	Outdoor unit	54.9	55.1	58.2	58.8
Compressor Type		ROTARY	ROTARY	ROTARY	ROTARY
Liquid line Gas line		1/4"/3/8"	1/4"/1/2"	1/4"/1/2"	3/8"/5/8"
Dimensions WxHxD (mm)	Indoor unit	715x194x285	805x194x285	957x213x302	1.040x220x327
	Outdoor unit	681x285x434	770x300x555	770x300x555	845x363x702
Net Weight	Indoor / Outdoor (kg)	7.6/23.5	8.5/28.9	10.6/35.7	13.4/47.9
Refrigerant		R22/550g	R22/880g	R22/1.250g	R22/1.700g
Operation Temperature Range (°C)	Cooling	18~43	18~43	18~43	18~43
	Heating	-7~24	-7~24	-7~24	-7~24
Loading Quantities per 20'/40' HC		140/320	104/240	90/208	66/154